



W I L D E R N E S S

WILDERNESS NAMIBIA

Little Kulala Lodge

Environmental Management Plan for Little Kulala Lodge, Staff Accommodation and Airstrip



Report date: 15 December 2025

Prepared by: Gerhard Thirion (Environmental Manager)

Namib Wilderness Safaris (Pty) Ltd. Reg. No. 87/085

Directors: A Margull, T Knoetze

E: info@wilderness.com.na T: + 264 61 274 500 F: + 264 61 239 455

Cnr Schinz & Merensky Street, Windhoek, Namibia. P.O. Box 6850, Windhoek, Namibia

www.wildernessdestinations.com



W I L D E R N E S S

INFORMATION SHEET

OPERATION

Little Kulala Lodge

NTB Registration: TNL 0006 Little Kulala Lodge
Company ID: Palmwag Lodge (PTY) Ltd 2002/569

REPORT DETAILS

Report Name: Environmental Management Plan Environmental for Little Kulala Lodge, Staff
Accommodation and Airstrip

Report Status: Final Report
Date: December 2025

PROPONENT

Wilderness

Contact Person: Gerhard Thirion

Designation: Environmental Manager)

Tel: + 264 61 274 500

Fax: + 264 61 239 455

Email: gerhardt@wildernessdestinations.com

Postal Address: P.O Box 6850 Windhoek.
Cnr Schinz and Merensky Street, Ausspannplatz, Windhoek, Namibia



W I L D E R N E S S

Table of Contents

1. Introduction	6
1.1 Background	6
1.2 The lodge	8
1.3 Airstrip	11
1.4 Staff village	12
2. Environmental management plan	13
2.1 Aims	13
2.2 Objectives	14
2.3 Management Actions	14
2.4 Roles and Responsibilities	14
2.5 Schedule	14
2.6 Requirements for Implementation	15
2.7 Planning	15
2.8 Construction	17
2.9 Operation	25
2.10 Closure	35
2.11 Rehabilitation and Closure Objectives	36
2.12 Guideline tables	37
3. Environmental Monitoring	40
3.1 Water Monitoring Programme	40
4. Environmental Performance Assessment	41
5. Environmental awareness	42
5.1 Job Specific Environmental Awareness Training	42
6. Complaints Register	42

Namib Wilderness Safaris (Pty) Ltd. Reg. No. 87/085

Directors: A Margull, T Knoetze

E: info@wilderness.com.na T: + 264 61 274 500 F: + 264 61 239 455

Cnr Schinz & Merensky Street, Windhoek, Namibia. P.O. Box 6850, Windhoek, Namibia

www.wildernessdestinations.com



W I L D E R N E S S

7. Environmental Emergency Procedures	42
7.1 Sewage or Waste Water Spills	42
7.2 Hydrocarbon or Chemical Spills	42
8. Conclusion	43

List of tables

Table 1: Refurbishment table	9
Table 2: Roles ascribed to parties	14
Table 3: Planning guidelines table	15
Table 4: Construction guidelines table	17
Table 5: Closure guidelines table	35
Table 6: Disposal of Waste	37
Table 7: Storage of hazardous chemical substances	39
Table 8: Handling of hazardous chemical substances	39
Table 9: Disposal of hazardous chemical substances	40
Table 10: Environmental Performance Assessment Programme for Little Kulala Camp, Staff Village and Airstrip	41

List of Figures

Figure 1: The location of Little Kulala Lodge.....	7
Figure 2: Map of the Kulala Wilderness reserve and location of the lodge.....	8
Figure 3: Fire plan and lay out of the lodge.....	10
Figure 4: Little Kulala guest room.....	10
Figure 5: The aerial view of the Geluk airstrip.....	11
Figure 6: Google earth map of the Little Kulala Lodge and staff village.....	12
Figure 7: Little Kulala back of house and staff village lay out and fire plan.....	13



W I L D E R N E S S

LIST OF TERMS, ACRONYMS AND ABBREVIATIONS

BID	Background Information Document
DWA	Department of Water Affairs
EA	Environmental Assessment
EC	Environmental Commissioner
ECO	Environmental Control Officer
EIA	Environmental Impact Assessment
EMA	Environmental Management Act
EMP	Environmental Management Plan
HRM	Human Resource Manager
IAP	Interested and Affected Party
LKL	Little Kulala Lodge
masl	Metres above sea level
MAWF	Ministry of Agriculture, Water and Land Reform
MEFT	Ministry of Environment, Forestry and Tourism
PM10	Particulate matter with a diameter smaller than 10 micro meters



W I L D E R N E S S

WILDERNESS

ENVIRONMENTAL MANAGEMENT PLAN FOR LITTLE KULALA LODGE, STAFF VILLAGE AND AIRSTRIP

1. Introduction

1.1 Background

Kulala Desert Lodge is located at Farm Eensaam No. 157 Maltahohe, within the arid Namib Desert on the 27 000-hectare (67 000-acre) private Kulala Wilderness Reserve about 16km south of Sesriem. In the mid 1990's Wilderness Safaris acquired farm Witwater and Eensaam bordering the Namib Naukluft Park and later acquired the farm Geluk these farms became the Kulala Wilderness reserve. The farm Witwater and its assets was sold in 2013. In 1996 Wilderness set up an operation on land close to the spectacular Sossusvlei. This locale had previously been used for subsistence goat farming, precious little indigenous wildlife remained. Today, with careful rehabilitation, the land and its wildlife are back to its former glory.

When Wilderness began operating on the reserve, a massive programme to remove all internal fences and livestock was undertaken and the recovering health of the ecosystem brought the wildlife back. Then, the fence that divided the Kulala Wilderness Reserve (KWR) and the Namib Rand Nature Reserve was dropped, and while those between KWR and the adjacent Namib-Naukluft National Park remain, they are no impediment to the movement of wildlife.

The vision of Wilderness Safaris is to conserve the unique biodiversity of the reserve and all of its components.

The reserve is dedicated to supporting a range of conservation research projects on the unique ecology of the Namib Desert, including studies on bat-eared foxes, mongooses and other small carnivores.

Wilderness are and active participant in the greater Greater Naukluft Sossusvlei Landscape and participate in all game counts and projects along with our neighbours.

Namib Wilderness Safaris (Pty) Ltd. Reg. No. 87/085

Directors: A Margull, T Knoetze

E: info@wilderness.com.na T: + 264 61 274 500 F: + 264 61 239 455

Cnr Schinz & Merensky Street, Windhoek, Namibia. P.O. Box 6850, Windhoek, Namibia

www.wildernessdestinations.com



W I L D E R N E S S



Figure 1: The location of Little Kulala Lodge



WILDERNESS

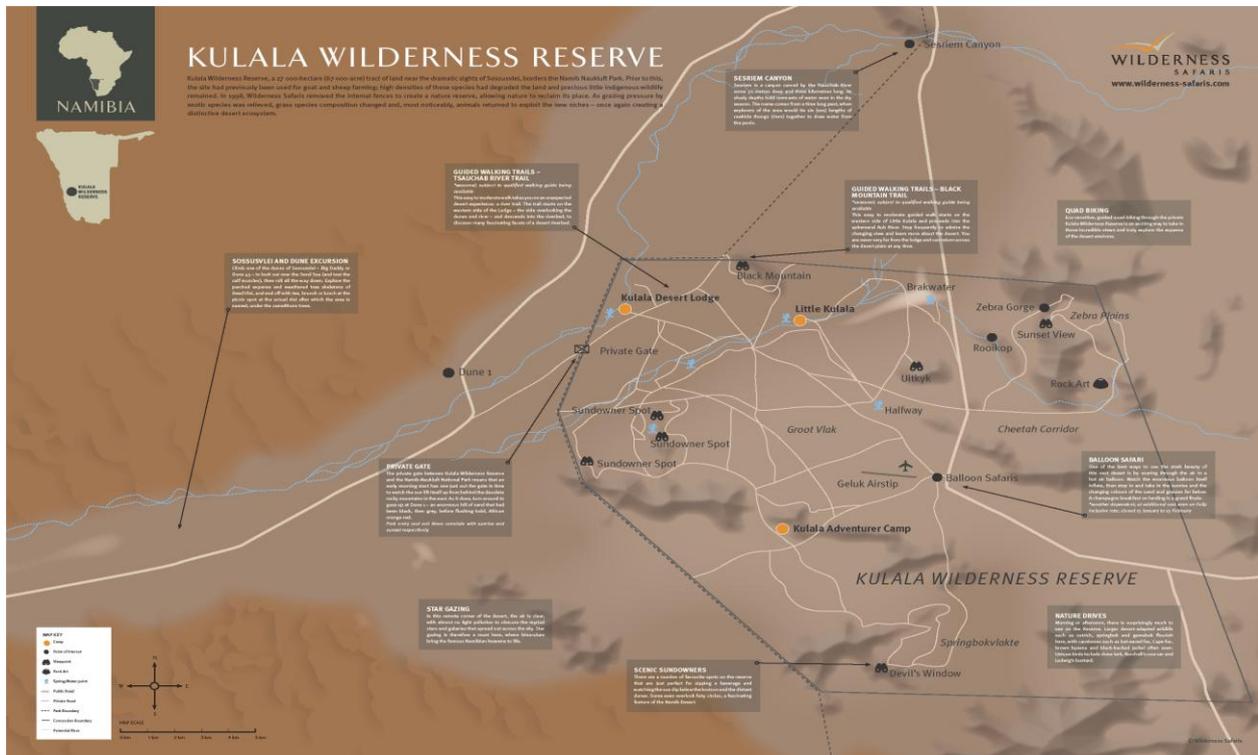


Figure 2: Map of the Kulala Wilderness reserve and location of the lodge

1.2 The lodge

Accommodation consists of 11 climate-controlled, thatched chalets "kulalas" (the word means 'to sleep') which merge impeccably into the desert landscape, each with private plunge pool, both indoor and outdoor showers a star bed for romantic star gazing and rooftop viewing platform. The lodge was upgraded during 2019, using the same footprint, with the addition of wooden walkways connecting the rooms and new interiors the buildings include a swimming pool, a library/entertainment area, wine cellar, craft boutique, lounge, Spa and dining areas. Little Kulala's interiors make use of neutral colours, gorgeous textures and natural light and takes its inspiration from its surroundings, notably from the magnificent Dead Vlei. This is the closest point of access to the iconic dunes of Sossusvlei as the reserve has a private access gate to the Namib Naukluft Park sand sea area. All the lodge buildings are made of brick walls, glass, gum poles, wood and thatch.

Refurbishment in 2019 saw renewed interiors, decks, and thatch using the existing infrastructure. The table below list changes brought about during the refurbishment of note is the addition of a solar plant, spa for guests, wooden walkways connecting the rooms and additional staff rooms.

The refurbishment project saw the following changes:

Namib Wilderness Safaris (Pty) Ltd. Reg. No. 87/085

Directors: A Margull, T Knoetze

E: info@wilderness.com.na T: + 264 61 274 500 F: + 264 61 239 455

Cnr Schinz & Merensky Street, Windhoek, Namibia. P.O. Box 6850, Windhoek, Namibia

www.wildernessdestinations.com



W I L D E R N E S S

Table 1: Refurbishment table

Previous Little Kulala Camp Infrastructure	Refurbished Little Kulala Camp Infrastructure
Number of guest tents: 11	Number of guest tents: 11 (Using the same footprint)
Kitchen, Office, Wine cellar, Library, Main area pool, store rooms, training room, fire places (Dining Room, Lounge & toilets)	Kitchen, Office, Wine cellar, Library, Main area pool, store rooms, training room, fire places (Dining Room, Lounge & toilets)
	Spa added for treatments of guests
Pathways laid out on the ground	Wooden walkways laid out to connect rooms and main area.
Staff village, manager rooms, guides rooms, senior staff rooms	Staff village, manager rooms, guides rooms, senior staff rooms, 10 new junior staff rooms, 1 management unit and 1 new ablution block added.
Generator running for camp power	Camp is 100% solar powered. Solar Photovoltaic Energy system with batteries and inverter system (only backup generator in case insufficient energy to charge batteries)
Electric water geysers	Solar water geysers
Vehicle wash bay	Vehicle wash bay with oil trap
Waste water treatment: Dual-chambered septic tanks with soak-away systems. Multi-chambered fat traps at guest and staff village kitchens.	Waste water treatment: Dual-chambered septic tanks with soak-away systems and an evaporation pond. Multi-chambered fat traps at guest and staff village kitchens.
Borehole water source	Borehole water source
Fuel storage on impermeable bunded surface (fuel spills cannot enter into the environment).	Fuel storage on impermeable bunded surface (fuel spills cannot enter into the environment).

Namib Wilderness Safaris (Pty) Ltd. Reg. No. 87/085

Directors: A Margull, T Knoetze

E: info@wilderness.com.na T: + 264 61 274 500 F: + 264 61 239 455

Cnr Schinz & Merensky Street, Windhoek, Namibia. P.O. Box 6850, Windhoek, Namibia

www.wildernessdestinations.com



WILDERNESS



THE FIRE ALARM:

- Three long blasts on your emergency horn is the fire alarm, to be sounded in the event of a fire in your unit.

IF YOU CAN CONTROL THE FIRE:

- If you are able to smother or dampen the fire, please do so.
- If you are sure the fire is controllable and you are able to operate the fire extinguisher (located in your unit, as indicated at check-in) properly, direct the spray at the base of where the flames appear to be.
- Under no circumstances attack a large fire or even approach the smoke zone if you are alone.
- Please do not take chances!

FIRE STATIONS:

The main fire station(s) (indicated on the map) are equipped with fire extinguishers, fire beaters, sand buckets, rakes and axes.

IF YOU CANNOT CONTROL THE FIRE:

- Evacuate immediately, taking the horn with you if possible.
- Find your way to the nearest assembly point as indicated on the map; camp staff will direct you further.
- If you are unable to reach the assembly point, proceed to any nearby area that is safe and alert camp staff by using the emergency horn provided in your room.

FIRE IN THE MAIN AREA:

In an event of a fire in the main area building, evacuate immediately and gather in the assembly point as indicated on the map.

Please take time to familiarise yourself and your companions with this map.

Your safety is of our utmost concern – stay calm and move away from danger. Please try and assist other guests who may be experiencing difficulties. Don't return to your room unless escorted by staff.



Figure 3: Fire plan and layout of the lodge



Figure 4: Little Kulala guest room



W I L D E R N E S S

1.3 Airstrip

Kulala Wilderness Reserve airstrip (Geluk Airstrip) is located south east, about 7 km from the lodge. The specifications of the airstrip are, Length: 1200m; Elevation: 731 m; Co-ordinates: S24:40:24 E15:47:36. The infrastructure at the airstrip include 2 flush toilets, water tank and a fuel storage area, a fire shed, a waiting area and a fence around the airstrip to prevent wildlife on the runway. The airstrip serves both Kulala Desert Lodge and Little Kulala Lodge.

NO turn around on the run way and no low flying is permitted. Aircrafts are only allowed to turn around at each end of the runway. The apron/parking is on the eastern end of the runway on the north-eastern side of the airstrip. The aircrafts are only permitted to park in this apron on the blocks for overnights as well as for drop-offs/pick-ups.

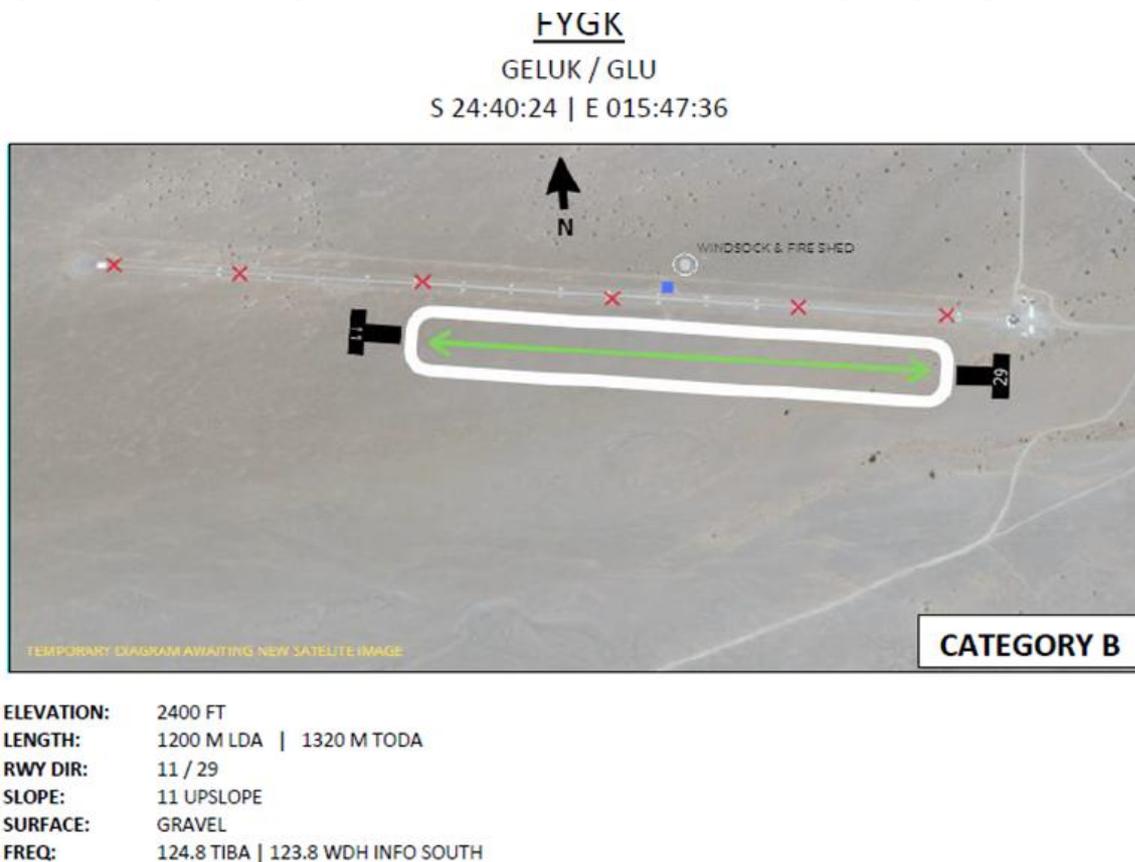


Figure 5: The aerial view of the Geluk airstrip



W I L D E R N E S S

1.4 Staff village

The staff village is located about 1Km east of the main lodge with the management accommodation adjacent to the lodge. The infrastructure at the staff village includes, 32 junior staff units, 7 guide rooms, 2 senior staff rooms ablution blocks, laundry area, kitchen, dining area and an entertainment area.

Other lodge supporting infrastructure include, 5 management units, 3 pilot/guide units, a kitchen, cold room, a dry food storage room, maintenance storage, laundry, housekeeping storage rooms, a parking area for safari vehicles and tourists, 5 electric E bikes, 10 quad bikes, a waste storage, three 2200 litre fuel tanks, a battery bank, inverter room, three 10000 litre water tanks, waste holding cage, burn pit and 198 KW Solar Plant for a full solar power supply with a 110 KVA diesel generator as back up.



Figure 6: Google earth map of the Little Kulala Lodge and staff village

Namib Wilderness Safaris (Pty) Ltd. Reg. No. 87/085

Directors: A Margull, T Knoetze

E: info@wilderness.com.na T: + 264 61 274 500 F: + 264 61 239 455

Cnr Schinz & Merensky Street, Windhoek, Namibia. P.O. Box 6850, Windhoek, Namibia

www.wildernessdestinations.com



W I L D E R N E S S

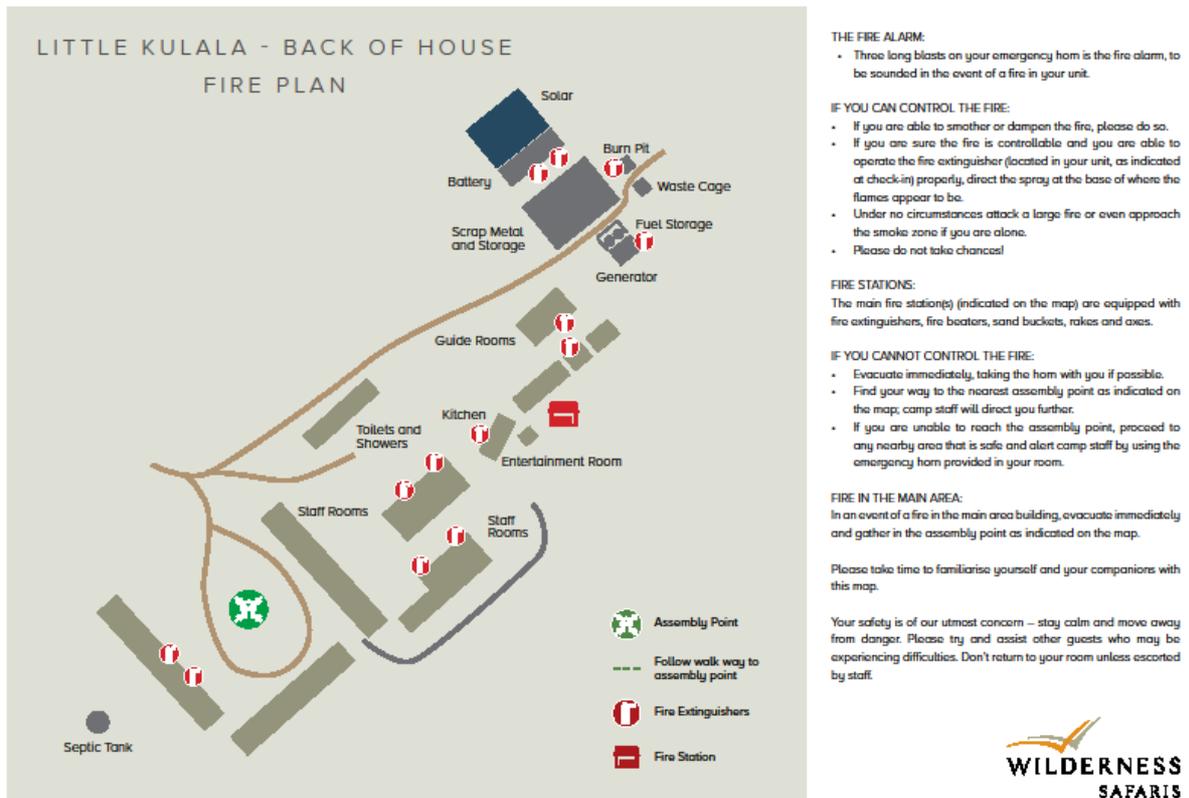


Figure 7: Little Kulala back of house and staff village lay out and fire plan

2. Environmental management plan

2.1 Aims

The EMP was undertaken in accordance with Namibia's Environmental Assessment Regulations (2012) and the Listing of Activities That May Not Be Undertaken without an Environmental Assessment (2012) which was gazetted in February 2012. The aim of the environmental management plan (EMP) is to detail the actions required to effectively implement the mitigation measures identified. These actions are required to minimise negative impacts and enhance positive impacts associated with the management of the lodge and other supporting infrastructure.

The EMP gives the commitments, which form the environmental contract between Wilderness and the Government of the Republic of Namibia, represented by the Ministry of Environment and Tourism department of Environmental Affairs

It is important to note that an EMP is a living document in that it will be updated and amended as new information (e.g., environmental data), policies, authority guidelines and technologies develop.



W I L D E R N E S S

2.2 Objectives

Specific objectives are given for each of the actions described in the EMP. These objectives relate directly to addressing the impacts identified.

2.3 Management Actions

The various actions that need to be implemented in order to ensure that environmental objectives are met are described in the EMP. Each action is given a reference number. The actions are measurable and therefore are easy to monitor. Compliance with the EMP can thus also be audited.

2.4 Roles and Responsibilities

It is the responsibility of Wilderness to implement the EMP and to make sure that all the actions are carried out. The successful implementation of the EMP is however dependent on clearly defined roles and responsibilities for each of the management actions given.

Roles have been ascribed to the following parties:

Table 2: Roles ascribed to parties

Management:	The persons overall responsible for the management of the Little Kulala Lodge. Takes overall responsibility for implementation of the EMP.
Environmental Control Officer:	An environmental scientist appointed to provide support to the construction team and Wilderness staff in terms of implementation of environmental management measures, as appropriate.
Human Resources Manager:	Persons responsible for employment of persons at Wilderness.
Maintenance:	Person responsible for the maintenance of vehicles and machinery, as well as the sewage and waste water systems.
Guides:	Persons responsible for the transport of guests in and around the site. The guides are also responsible for ensuring that human wildlife interactions take place in an appropriate manner.
Contractor:	Person responsible for all construction activities.

2.5 Schedule

The schedule serves to give the time frame for the environmental action to commence. It is not always possible to the implement an action immediately as some actions require planning and the availability of financial and/or human resources



W I L D E R N E S S

before they can be implemented. The successful commencement of the committed action within the specified time-frame is to be monitored.

2.6 Requirements for Implementation

This component of the EMP details what is required for the action to be implemented successfully. This includes equipment, supplementary documentation, protocols and additional actions that may need to be put into place.

2.7 Planning

Due to the sensitive nature of the site, the activities are carried out in a manner that ensures limited environmental disturbance. It was therefore important to incorporate the general environmental and development guidelines for the Concession, as well as best practise, into the project design and planning. The following guidelines were taken into account during the planning process:

Table 3: Planning guidelines table

Ref.	Objective
1	Soils, land capability and land use
Objective: To prevent the unnecessary compaction of, and damage to, soils.	
1.1	Planning to align access with existing roads. No new roads or tracks are to be developed within the concession area.
	Planning of the development to align the layout with the currently disturbed footprint. Limit expansion of the footprint to minimise disturbance.
	Location of the airstrip at a site that requires the least physical alteration and minimises the disturbance of natural vegetation.
Objective: To prevent soil erosion.	
1.2	No disturbances will take place within areas containing highly erodible dispersed, fine-particle, sodic etc. soils
1.3	Water pipes have been routed so as to minimise the chance of erosion.
Objective: To protect soil resources and land capability.	
1.4	Wherever possible, any new structures or developments have been sited on already impacted areas.
2	Topography
Objective: To prevent significant topographical alterations.	
2.1	Facilities designed to require the least site levelling and landscaping.
3	Fauna



W I L D E R N E S S

Objective: To ensure that no protected species are affected by the construction activities.	
3.1	Sites with nests, burrows, dens etc. of protected species will be avoided.
3.2	Overhead lines will be located unobtrusively and possible elephant damage has been considered.
4	Flora
Objective: To ensure that no protected species are affected by the construction activities.	
4.1	No construction will disturb protected plant species.
Objective: To prevent unnecessary damage to vegetation.	
4.2	Water pipes have been routed so as to minimise the chance of erosion.
4.3	Infrastructure must be sited so as to require the removal of the least amount of vegetation.
5	Surface water resources
Objective: To prevent the disruption of local hydrology	
5.1	No development activities will take place within 1:100 year flood line.
5.2	No soil disturbance will be allowed in the vicinity of any natural springs/seepages.
5.3	No permanent accommodation structures are to be developed in the Hoanib River or within its riparian zone.
6	Groundwater resources
Objective: Water conservation	
5.1	Water conservation must be actively promoted, including installation of low-flow showerheads etc. Other innovations such as waterless toilets will be investigated and implemented.
5.2	Meters will be installed to measure water use (targets for water use to be set and used as benchmark).
6	Visual environment
Objective: To limit the negative visual impact of the project.	
6.1	Large catchments with low visual absorption capacities require sensitive location and construction of facilities, or avoidance.
6.2	The shape, nature, colour and texture of materials used for construction will meld with the local landscape.
6.3	No constructions will break the skyline.
6.4	Subdued and directional lighting will be used.
6.5	Masts and towers are to be as unobtrusive as possible.
7	Sewage and waste water management
Objective: To prevent ecological impacts caused by sewage and waste water discharge.	
7.1	No sewage facilities will be located within 50 m of any water body or source.
7.2	Fat/grease traps will be installed at kitchen outlets.
8	Energy
Objective: To maximise energy efficiency	



W I L D E R N E S S

8.1	Maximum use will be made of solar energy and gas.
8.2	Energy saving measures will be investigated and implemented (lights, etc.)
8.3	Only efficient, modern and silenced generators will be permitted and only as a backup.
9	Machinery / vehicles on site
Objective: Minimise the impacts associated with machinery and vehicle use	
9.1	Only efficient, modern and silenced generators will be permitted and only as a backup.
9.2	Vehicles and machinery are only to use existing access roads and defined development areas. Lichen fields and plains with sensitive, compactable soils will not be impacted.
10	Cultural resources
Objective: Protect the historic sites	
10.1	No disturbances will take place within 100 m of the historic sites.
11	General environmental
Objective: General environmental performance	
11.1	Permanent structures of appropriate design and using appropriate construction materials (including local materials sourced from permitted sites-ECO to specify). Touch the Earth Lightly principles will be implemented.

2.8 Construction

The construction was carried out in such a manner to ensure limited environmental disturbance. All contractors involved in the construction must be informed of the areas sensitivity and their activities monitored. The following guidelines will be enforced during the construction process:

Table 4: Construction guidelines table

Ref.	Objective	Responsibility	Schedule	Requirements for Implementation
1	Soils, land capability and land use			



W I L D E R N E S S

Objective: To prevent the unnecessary compaction of, and damage to, soils.

1.1	Motorised access should be limited to existing tracks and defined development areas. As far as possible, no new roads or tracks should be developed within the camp area.	Management & ECO	Immediate and ongoing	Environmental awareness plan and staff induction.
1.2	Prevent the compaction of soil or destruction of protective vegetation through the restriction of heavy vehicle movements.	Management & ECO	Immediate and ongoing	Environmental awareness plan and staff induction.

Objective: To prevent soil erosion.

1.3	No construction or activities within areas containing highly erodible dispersed, fine-particle, sodic etc. soils	ECO	Prior to construction	Identify highly erodible sites.
1.4	Prevent water runoff from concentrating unnaturally in any one area.	ECO	Ongoing	Site inspections
1.6	Any water pipes shall be installed in such a way as to minimise the chance of erosion.	Contractor	Immediate	

Objective: To prevent soil contamination.

1.7	The mixing and use of concrete and cement must takes placed in designated areas so as not to contaminate the sites in any way.	Contractor	Immediate & ongoing	Designated mixing areas.
-----	--	------------	---------------------	--------------------------



W I L D E R N E S S

1.8	All hydrocarbons and chemicals must be stored, handled and dispensed so as not to contaminate sites in any way.	Contractor	Immediate & ongoing	Lined and bunded storage areas.
1.9	Any spillage must be contained and cleaned up with 24hrs of occurrence. The resulting waste must be properly disposed of.	ECO & Contractor	As required	
Objective: To protect soil resources and land capability.				
1.10	The boundaries of construction sites that extend beyond already impacted areas must be clearly demarcated. Where construction will take place within or close to sensitive features, these should be demarcated.	ECO	Immediate	Demarcation of construction areas. Demarcation of sites of particular sensitivity with "Do not Disturb" signage.
1.11	No construction activities are to take place outside of the defined infrastructure footprint areas.	Contractor	Immediate	Site plans to clearly define construction areas.
1.12	Quarries/borrow pits may not be dug without formal registration/permission.	ECO & Contractor	Immediate & ongoing	Approval Demarcate sources.
1.13	The movement of construction crew must be within the demarcated site boundaries at all times.	ECO & Contractor	Immediate & ongoing	Site boundary demarcation.
1.14	A suitably positioned construction material stockpiling and mixing area must be chosen and demarcated. This must be located in an area that is already transformed or disturbed.	ECO & Contractor	Immediate & ongoing	Selection of laydown area. Demarcate area.
1.15	Access routes from the stockpiling areas to the building sites should be demarcated and use enforced. Existing roads should be used for these purposes.	ECO & Contractor	Immediate & ongoing	Clearly demarcated routes. Environmental awareness plan and staff induction.
1.16	Sand and rocks utilised for construction must be from defined and already impacted areas. These sites must be identified and approved by the ECO.			



W I L D E R N E S S

1.17	Once all construction work has been completed, all excess material must be removed the site suitably rehabilitated.	Contractor	Completion of construction	Rehabilitation plan
1.18	The use of graders is to be avoided because they "gouge" roads below the level of the surrounding surface.	Contractor	Ongoing	
2	Topography			
Objective: To prevent significant topographical alterations.				
2.1	Site levelling and landscaping only where required by the designs.	Contractor	Construction	
3	Fauna			
Objective: To ensure that no protected species are affected by the construction activities.				
3.1	Avoid any sites with nests, burrows, dens etc. of protected species.	ECO	Immediate & ongoing	Identify sites with nests, burrows, dens etc. of protected species. Demarcation of sensitive sites.
Objective: To prevent ecological impacts caused by sewage and wastewater discharge.				
3.2	Refer to section 8			
Objective: To prevent ecological impacts caused by fire.				
3.3	Refer to section 12			
Objective: To prevent staff from poaching.				
3.4	Refer to section 11			
3.5	The greater area around building sites should be searched for snares during the construction phase and after the construction phase is complete.	ECO	Ongoing and upon completion of construction	
4	Flora			
Objective: To ensure that no protected species are affected by the construction activities.				
	No Welwitschias may be harmed. No Lichen fields may be harmed No protected plants may be damaged or removed.	ECO	Ongoing	Environmental awareness plan and staff induction. Demarcation of sensitive sites.



W I L D E R N E S S

			Continuous monitoring to ensure that no protected species are impacted.
Objective: To prevent unnecessary damage to vegetation.			
Motorised access should be limited to existing tracks and defined development areas. As far as possible, no new roads or tracks should be developed within this area.	All	Ongoing	Environmental awareness plan and staff induction.
The clearance of or damage to trees and shrubs beyond the development footprint must be prevented.	All	Ongoing	Environmental awareness plan and staff induction. Demarcation of sensitive sites.
As many trees and shrubs as possible should be retained within the development area.	All	Ongoing	Demarcate individual specimens that must not be damaged
Ensure that only permitted access roads and paths are used by construction workers and vehicles at all times.	All	Ongoing	Environmental awareness plan and staff induction.
No firewood may be collected	All	Ongoing	Environmental awareness plan and staff induction.
Objective: To prevent the spread of alien invasive vegetation.			
No alien invasive or plants that do not occur locally will be planted.	ECO	Ongoing	
Introduced construction materials must be free from seedlings and seeds of alien invasive vegetation.	Management	Ongoing	
Objective: To prevent ecological impacts caused by sewage and wastewater discharge.			
Refer to section 8			

Objective: To prevent ecological impacts caused by fire.			
4.9	Refer to section 12		
Objective: To prevent staff from damaging the local environment.			
4.10	Refer to section 11		
5	Surface water resources		
Objective: To prevent the disruption of local hydrology			
5.1	No construction activities may take place within 1:100 year flood line of any watercourse or within 50 of a spring.		



W I L D E R N E S S

5.2	Rivers to be entered and exited using only existing approaches and entrance/exit points.	All	Ongoing	Environmental awareness plan and staff induction. Mark entrance and exit points.
Objective: To prevent hydrological impacts caused by sewage and wastewater discharge.				
5.3	Refer to section 8			
Objective: To prevent surface water contamination.				
5.4	The mixing and use of concrete and cement must be only take place in designated areas so as not to contaminate the sites in any way.	ECO & Contractor	Ongoing	Identify and prepare mixing sites.
5.5	All hydrocarbons and chemicals must be stored, handled and dispensed so as not to contaminate sites in any way.	ECO, Maintenance	Ongoing	Designated bunded area. Use of drip trays
6	Visual environment			
Objective: To limit the negative visual impact of the project.				
6.1	As far as possible, no new roads or tracks should be developed.	All	Ongoing	Environmental awareness plan and staff induction.
7	Waste management			
Objective: Prevent pollution caused by improper waste management.				
7.1	Littering is not permitted and all waste must be placed in appropriate receptacles.	All	Ongoing	Environmental awareness plan and staff induction
7.2	The contractor will provide a suitable, animal proof receptacle to contain all, daily refuse. Refuse will be disposed of regularly at a location adjacent to the current waste pit in an environmentally appropriate manner.	Contractor & ECO	Ongoing	Suitable receptacles
7.2	All building rubble is to be consolidated in a suitable location, removed from the area and disposed of in a suitable and legal location in an environmentally acceptable manner.	Contractor & ECO	Ongoing	ECO to identify suitable manner.
7.3	Used oils and other workshop waste to be stored in suitable receptacles and dispatched to appropriate waste facility.	Contractor & ECO	Ongoing	ECO to identify



W I L D E R N E S S

				suitable facility.
8	Sewage and waste water management			
Objective: To prevent ecological impacts caused by sewage and wastewater discharge.				
8.2	Fat/grease traps installed at kitchen outlets will be installed.	Maintenance	Ongoing	
8.3	Adequate temporary ablutions to be provided for workers.	Contractor	Ongoing	
8.4	The ablutions must be regularly services and the sewage disposed of at a suitable designated location and in an environmentally appropriate manner.	Contractor	Ongoing	
Objective: To prevent unpleasant odours from being generated by sewage and wastewater discharge.				
8.5	Should unpleasant odours be identified, the source of the odours must be identified and the remedied within 1 week of identification.	Maintenance	Within 1 week of identification	
9	Machinery / vehicles on site			
Objective: Minimise the impacts associated with machinery and vehicle use				
9.1	Efficient, modern, silenced generator only.	Management	Immediate	
9.2	The contractor will ensure that all equipment is in good working order and will not contaminate soil or water resources with diesel, petrol, oil or any other foreign substances.	Management	Immediate	
9.3	Drip trays to be place under any leak that is identified. Vehicles and machinery with fuel, oil or hydraulic fluid leaks must be removed from service for repair. No servicing or major repair of vehicles and machinery may take place on-site.	ECO & Contractor	As required	Drip trays
9.4	The contractor shall ensure that all vehicles remain on designated roads at all times. No off-road driving under any circumstances.	All	Ongoing	Environmental awareness plan and staff induction.



W I L D E R N E S S

9.5	All vehicles used in the area (i.e., those of the Wilderness and contractors) must be operated with low tyre-pressure to minimise negative impacts on tracks and roads.	All	Ongoing	Environmental awareness plan and staff induction. Wilderness must inform all contractors of this requirement.
10	Construction staff on site			
Objective: To prevent the staff of site from damaging the local environment.				
10.1	The contractor and his employees shall adhere to any rules and regulations that the MEFT may prescribe at all times as well as the management measures presented in this document.	All	Ongoing	Environmental awareness plan and staff induction.
10.2	The contractor must ensure the proper supervision of employees at all times and their abidance to any rules and regulations.	Contractor	Ongoing	Environmental awareness plan and staff induction.
10.3	Access to the site must be restricted to contractor's employees only.	Contractor	Ongoing	Environmental awareness plan and staff induction.
10.4	All employees must be educated to the need to refrain from the destruction of plants and animals, as well as from indiscriminate defecation, waste disposal and or pollution of soil and water resources.	Contractor & ECO	Ongoing	Environmental awareness plan and staff induction.
Objective: To minimise the risk of fire.				
10.5	Refer to section 12			
11	Fire			
Objective: To minimise the risk of fire.				
11.1	The proponent must take all precautions to prevent the outbreak and spreading of fires and is to ensure all employees are aware of the necessary precautions.	ECO & all	Ongoing	
11.2	Gas canisters to be housed in Bureau of Standards approved structures.	Management	Ongoing	
11.3	Fire extinguishers to be strategically located throughout developed area.	Management & ECO	Ongoing	



W I L D E R N E S S

13	Cultural resources			
Objective: Protect the historic sites				
13.1	No construction activities may take place within 100 m of the historic sites.	Management & ECO	Ongoing	Demarcate historic sites.
13.2	In the event of chance finding of any archaeological artefacts during construction, construction activities at that site must be suspended, the area to be fenced and a competent archaeologist contacted immediately	Management & ECO	Ongoing	Demarcate historic sites.
14	EMP implementation			
Objective: To ensure effective implementation of the EMP				
14.1	Develop an environmental awareness plan and undertake staff induction.	Environmental Manager	Immediate & ongoing	All contractors to be informed of EMP requirements. Environmental induction of all personnel accessing site
14.2	Monthly internal audits of EMP compliance	ECO & Environmental Manager	Immediate	Performance assessment requirements are addressed in section 4
14.3	An Environmental Control Officer (ECO) should be appointed to oversee developments and ensure compliance with the EMP.	Management	Immediate	ECO appointment (to oversee all Wilderness sites)
14.4	Penalties should be determined for violations of the EMP, including off-site impacts and trees or features that may be defaced or destroyed. Irreplaceable and/or critical features must be clearly marked.	Management	Immediate & ongoing	Induction & awareness training. Develop and implement penalty system.

2.9 Operation

This is the current phase of the project. The table below sets out the guidelines and environmental objectives applied during the operations.

Ref.	Objective	Responsibility	Schedule	Requirements for Implementation
1	Soils, land capability and land use			



W I L D E R N E S S

Objective: To prevent the unnecessary compaction of, and damage to, soils.				
1.1	Motorised access must be limited to existing roads. No new roads or tracks should be developed.	Management & ECO	Ongoing	Environmental awareness plan and induction.
1.2	No off road driving under any circumstances.	Management & ECO	Ongoing	Environmental awareness plan and induction.
1.3	All vehicle parking to take place in designated parking areas	Management	Ongoing	
Objective: To prevent soil erosion.				
1.4	Implement measures to disperse concentrated water flow and repair any erosion that has resulted.	Management & ECO	Ongoing	
Objective: To prevent soil contamination.				
1.5	Oil pans to be used in vehicle parking areas (under vehicles that leak) Fuel dispensing to take place over impervious, bunded surface or drip trays. Vehicle servicing to take place impervious, bunded surfaces or over oil pans	Management & ECO	Immediate & ongoing	Oil pans.
1.6	Used oil to be stored in appropriate receptacle and despatched to appropriate waste facility.	Management & ECO	Immediate & ongoing	Identify appropriate waste facility.
1.7	Fuel storage in appropriate receptacle and in bunded areas. Fuel dispensing to take place over bunded areas Generator placed in bunded areas.	Management & ECO	Immediate & ongoing	Bunded areas
Objective: To prevent ecological impacts caused by sewage and wastewater discharge.				
1.8	Refer to section 10			
2	Fauna			
Objective: To minimise the impacts associated with employee and guest interaction with wildlife.				
2.1	Guests and employees should still be sensitised to the need to be aware of wildlife and of the appropriate way to interact with wildlife (in accordance with the Wilderness Safari's Protocol).	Management & guides	Ongoing	Conservation protocols



W I L D E R N E S S

2.2	Trained guides to escort guests at all times, no self-drive or walking other than in accepted designated areas	Guides	Ongoing	
2.3	Adherence to wildlife viewing protocols is essential.	Guides & ECO	Ongoing	Rhino viewing protocols
2.4	Wildlife and all environmental interactions should follow conservation protocols (Wilderness Safari's Protocol).	Guides & ECO	Ongoing	Conservation protocols
2.5	The Concessionaire shall preserve the Concession Area and its game and botanical species and ensure that all its guests, visitors and employees who enter the Concession Area shall do likewise.	Management	Ongoing	Environmental awareness plan and induction.
2.6	No game or other natural resource and/or occurrences may be disturbed, violated, mutilated, destroyed, killed or removed.	All	Ongoing	
Objective: To ensure that no protected species are affected by the operational activities.				
2.7	Avoid any sites with nests, burrows, dens etc. of protected species.	ECO	Immediate	Identify sites with nests, burrows, dens etc. of protected species.
Objective: To prevent ecological impacts caused by sewage and wastewater discharge.				
2.8	Refer to section 10			
Objective: To prevent ecological impacts caused by fire.				
2.9	Refer to section 14			
Objective: To prevent staff from poaching.				
2.10	Refer to section 13			
2.11	The greater area around the site should be regularly searched for snares.	ECO	Ongoing	

3	Flora			
Objective: To ensure that no protected species are affected by the operational activities.				
3.1	No Welwitschias may be disturbed by the operational activities.	ECO	Immediate	Monitor for protected, rare or endangered plant species. Conservation/recovery plan.



W I L D E R N E S S

	No Lichen fields may be disturbed by the operational activities No protected plants may be damaged or removed.			
Objective: To prevent unnecessary damage to vegetation.				
3.2	Ensure that only permitted access roads and paths are used by employees, guest and vehicles at all times.	All	Ongoing	Environmental awareness plan and induction.
3.3	No off-road driving under any circumstances.	All	Ongoing	Environmental awareness plan and induction.
3.4	The Concessionaire shall preserve the Concession Area and its game and botanical species and ensure that all its guests, visitors and employees who enter the Concession Area shall do likewise.	Management	Ongoing	
3.5	No plant life or other natural resource and/or occurrences may be disturbed, violated, mutilated, destroyed, killed or removed.	All	Ongoing	
3.6	No firewood collection; firewood to be bought in from reputable source.	All	Ongoing	Environmental awareness plan and induction.
Objective: To prevent the spread of alien invasive vegetation.				
3.7	The area will be kept free of any alien vegetation that has or may inadvertently be introduced.	ECO	Ongoing	Monitor for alien vegetation. Remove alien vegetation and monitor for regrowth
Objective: To prevent ecological impacts caused by sewage and wastewater discharge.				
3.8	Refer to section 10			
Objective: To prevent ecological impacts caused by fire.				
3.9	Refer to section 14			
Objective: To prevent employees and guests from damaging the local environment.				
3.1	Refer to section 13			
0				
4	Surface water resources			
Objective: To prevent the disruption of local hydrology				

Namib Wilderness Safaris (Pty) Ltd. Reg. No. 87/085

Directors: A Margull, T Knoetze

E: info@wilderness.com.na T: + 264 61 274 500 F: + 264 61 239 455

Cnr Schinz & Merensky Street, Windhoek, Namibia. P.O. Box 6850, Windhoek, Namibia



W I L D E R N E S S

4.1	Rivers are to be entered and exited only at existing points. No off-road driving is permitted once the river is exited and, no driving in any seasonally inundated areas when flooded or moist.	ECO & guides	Immediate and ongoing	Identify and mark entry and exit points.
Objective: To prevent hydrological impacts caused by sewage and wastewater discharge.				
4.2	Refer to section 10			
Objective: To prevent surface water contamination.				
4.3	The use of biodegradable and eco-friendly soaps and detergents should be enforced in kitchens.	Management	Ongoing	
4.4	Oil pans to be used in vehicle parking areas (under vehicles that leak) Fuel dispensing to take place over impervious, bunded surface or drip trays. Vehicle servicing to take place impervious, bunded surfaces or over oil pans	ECO & management	Ongoing	
4.5	Used oil to be stored in appropriate receptacle and despatched to appropriate waste facility.	ECO	Ongoing	Identify appropriate waste facility.
5	Groundwater resources			
Objective: Water conservation				
5.1	Water conservation must be actively promoted. Guests to be informed of water scarcity and encouraged to participate in water conservation.	Management & ECO	Ongoing	
5.2	Measure and record water use (compare with targets for water use).	Management & ECO	Ongoing	Set water use benchmarks.
	Repair any leak in the water reticulation system within 24hrs of detection	Maintenance	As required	
Objective: Prevent water contamination				
5.3	The use of biodegradable and eco-friendly soaps and detergents should be encouraged.	ECO	Ongoing	
5.4	Oil pans to be used in vehicle parking areas (under vehicles that leak) Fuel dispensing to	ECO & management	Ongoing	



W I L D E R N E S S

	take place over impervious, bunded surface or drip trays. Vehicle servicing to take place impervious, bunded surfaces or over oil pans			
5.5	Used oil to be stored in despatched to appropriate waste facility.	ECO	Ongoing	Identify appropriate waste facility.
6	Air quality			
Objective: Prevent air pollution				
6.1	Burning will only be allowed for limited amounts of packaging.	Management	Immediate	
7	Noise			
Objective: To limit noise generation.				
7.1	Natural quiet should be achieved wherever possible (especially away from main routes), thus avoiding use of generators at lodges (generators will only be used as a backup).	Management	Ongoing	
8	Visual environment			
Objective: To limit the negative visual impact of the project.				
8.1	Motorised accessibility should be limited to existing roads and tracks.	All	Ongoing	Environmental awareness plan and induction.
8.2	Only subdued or directional lighting may be used.	Management	Ongoing	
9	Waste management			
Objective: Prevent pollution caused by improper waste management.				
9.1	All physical waste should be managed and either recycled or appropriately disposed.	Management & ECO	Ongoing	Waste management site.
9.2	No waste of any sort is to be buried in riverbeds.	Management & ECO	Ongoing	Environmental awareness plan and induction.
9.3	Appropriate, waste bins must be provided at the point of source. All waste bins will be covered and secured to be animal proof.	Management & ECO	Ongoing	Animal-proof containers.
9.4	A central waste collection depot is required. This area should be fenced and secured and it should have a concrete floor to ensure that it can be suitably maintained and no ground seepage will occur.	Management & ECO	Ongoing	Designated waste collection point.

Namib Wilderness Safaris (Pty) Ltd. Reg. No. 87/085

Directors: A Margull, T Knoetze

E: info@wilderness.com.na T: + 264 61 274 500 F: + 264 61 239 455

Cnr Schinz & Merensky Street, Windhoek, Namibia. P.O. Box 6850, Windhoek, Namibia



W I L D E R N E S S

9.5	If possible and appropriate, glass will be stored on site in suitable containers until there is sufficient to be transported for recycling.	Management	Ongoing	Suitable separation facility.
9.6	If possible and appropriate, tins, cans and foil will be stored on site in suitable containers until there is sufficient to be transported for recycling.	Management	Ongoing	Suitable separation facility.
9.7	If possible and appropriate, plastics will be stored on site in suitable containers until there is sufficient to be transported for recycling.	Management	Ongoing	Suitable separation facility.
9.8	If possible and appropriate, paper and cardboard will be stored on site in suitable containers until there is sufficient to be transported for recycling.	Management	Ongoing	Suitable separation facility.
9.9	All waste that cannot be recycled or sold will be stored on site in suitable containers. This must be disposed of at a permitted waste site.	Management & ECO	Ongoing	Identify permitted waste site.
9.10	Limited amounts of packaging may be burned in designated pit.	Management & ECO	Ongoing	
9.11	Organic waste may be buried in suitably designed "animal – proof" deep pits.	ECO	Ongoing	Ensure that the pit is "animal proof".
9.12	Used oil to be despatched to appropriate waste facility.	ECO	Ongoing	Identify appropriate waste facility.
10	Sewage and waste water management			
Objective: To prevent ecological impacts caused by sewage and wastewater discharge.				
10.1	Fat/grease traps at kitchen outlets to be maintained.	Maintenance	Immediate	
10.2	Septic tanks and soak-aways to be maintained.	Maintenance	Ongoing	
Objective: To prevent unpleasant odours from being generated by sewage and wastewater discharge.				
10.3	Qualitative monitoring of odours will take place.	All staff on site	Ongoing	
10.4	Should unpleasant odours be identified, the source of the odours must be identified and the remedied within 1 week of identification.	Maintenance	Ongoing	
11	Energy			
Objective: To maximise energy efficiency				
11.1	Energy use to be metered and monitored in order to ensure that efficiency is striven for.	Management & ECO	Ongoing	



W I L D E R N E S S

11.2	Energy saving measures to be continually implemented (lights, etc.)	Management & ECO	Ongoing	
11.4	Generator to only be used as a backup.	Management	Ongoing	
12	Machinery / vehicles on site			
Objective: To limit the impacts of machinery and vehicle use.				
12.1	No off-road driving under any circumstances.	All	Ongoing	Environmental awareness plan and induction.
12.2	An efficient, modern and silenced generator may only be utilised.	Management	Immediate & ongoing	
12.3	Ensure that all equipment is in good working order and does not contaminate soil or water resources with diesel, petrol, oil or any other foreign substances.	Management	Ongoing	
12.4	All vehicles used must be operated with low tyre-pressure to minimise negative impacts on tracks and roads.	Management	Immediate & ongoing	Environmental awareness plan and induction. Wilderness must inform all visitors of this requirement.
12.5	To limit track damage all vehicles used will be four-wheel-drive and will be of standard width.	All	Ongoing	Environmental awareness plan and induction.
12.6	Lichen fields and plains with sensitive, compactable soils should be avoided (once compacted by a vehicle, tracks remain for years due to the nature of the soils).	All	Ongoing	Environmental awareness plan and induction.
12.7	Oil pans to be used in vehicle parking areas (under vehicles that leak) Fuel dispensing to take place over impervious, bunded surface or drip trays. Vehicle servicing to take place impervious, bunded surfaces or over oil pans	Management & ECO	Immediate and ongoing	
13	Employees and guests on site			
Objective: To minimise the impacts associated with employee and guest interaction with wildlife.				
13.1	Guests and employees should still be sensitised to the need to be aware of wildlife and of the appropriate way to interact with wildlife.	Management	Ongoing	Environmental awareness plan and induction.



W I L D E R N E S S

13.2	Trained guides to escort guests at all times, no self-drive or walking other than in accepted designated areas.	Guides	Ongoing	
13.3	Adherence to any special requirements including adherence to accepted wildlife viewing protocols (Wilderness Protocols).	Guides	Ongoing	
Objective: To prevent the staff and guests from damaging the local environment.				
13.4	No picking of plants, collection of firewood or any other damage permitted.	All	Ongoing	
13.5	The staff and guests shall adhere to any rules and regulations that the MEFT may prescribe at all times as well as the management measures included in this document.	All	Ongoing	Environmental awareness plan and induction. Signage.
13.6	The site management must ensure the proper supervision of employees and guests at all times and their abidance to any rules and regulations.	Management	Ongoing	Environmental awareness plan and induction.
13.7	Access to the site must be restricted to employees and guests only.	Management	Ongoing	Environmental awareness plan and induction.
13.8	All employees must be educated to the need to refrain from the destruction of plants and animals, as well as from indiscriminate defecation, waste disposal and or pollution of soil and water resources.	Management	Ongoing	Environmental awareness plan and induction.
Objective: To minimise the risk of fire.				
13.9	Refer to section 14			
Objective: To ensure staff and guest safety.				
13.10	The likelihood of flash floods is very high during the rainy season. Storms in upper catchment areas may not be observed from the mid-lower reaches of rivers,	ECO & Management	Ongoing	

Namib Wilderness Safaris (Pty) Ltd. Reg. No. 87/085

Directors: A Margull, T Knoetze

E: info@wilderness.com.na T: + 264 61 274 500 F: + 264 61 239 455

Cnr Schinz & Merensky Street, Windhoek, Namibia. P.O. Box 6850, Windhoek, Namibia



W I L D E R N E S S

	so use of rivers should be avoided during rainy periods.			
14	Fire			
Objective: To minimise the risk of fire.				
14.1	The proponent must take all precautions to prevent the outbreak and spreading of fires and is to ensure all employees are aware of the necessary precautions.	Management	Ongoing	Emergency plan
14.2	Gas canisters to be housed in Bureau of Standards approved structures.	Management	Ongoing	
14.3	Fire extinguishers to be strategically located throughout developed area.	Management	Ongoing	
15	Cultural resources			
Objective: Protect the historic sites				
15.1	Guests must be prevented from damaging these historical sites. Warning signs must be erected.	ECO & Management	Ongoing	Demarcate site.
16.	EMP implementation			
Objective: To ensure effective implementation of the EMP				
16.1	Bi-annual internal audits of EMP compliance	ECO	Immediate	Performance assessment requirements are addressed in section 4
16.2	Independent expert to conduct annual compliance audit.	Independent Consultant	Annual	Performance assessment requirements are addressed in section 4



W I L D E R N E S S

16.3	Submission of external annual report to environmental authorities	ECO	Annual	Performance assessment requirements are addressed in section 4
16.5	Penalties should be determined for violations of the EMP, including off-site impacts and trees or features that may be defaced or destroyed. Irreplaceable and/or critical features must be clearly marked.	Management	Immediate & ongoing	Induction & awareness training. Develop and implement penalty system.

2.10 Closure

The closure objectives and guidelines are for planning and implementation should the lodge be closed down at a future date.

Table 5: Closure guidelines table

Ref.	Objective	Responsibility	Schedule	Requirements for Implementation
1	Soils, land capability and land use			
Objective: To ensure the restoration of land capability after closure.				
1.1	Motorised access should be limited to existing roads or tracks and disturbance areas.	All	Closure	Induction & awareness training.
1.2	All structures will be completely removed to the satisfaction of MET.	ECO & Management	Closure	
1.3	All introduced materials are to be removed from the site and appropriately disposed.			
2	Flora			
Objective: Restore site to pre-construction state				
2.1	The site will be suitably re-vegetated or if this is not appropriate then it will be covered with scrub to ensure that	ECO & Management	Closure	



W I L D E R N E S S

	soil erosion does not result and to provide protection for reseeded vegetation.			
2.2	Follow ups will be done to ensure that alien or invasive plants and weeds have not flourished.	ECO	2 years following closure	
3	Visual environment			
Objective: Restore visual quality to original state				
3.1	All structures will be completely removed to the satisfaction of MET.	ECO & Management	Closure	
3.2	Disturbed sites should be shaped to fit with the surrounding topography	ECO & Management	Closure	
3.3	The site will be suitably re-vegetated or if this is not appropriate then it will be covered with scrub to ensure that soil erosion does not result and to provide protection for reseeded vegetation.	ECO & Management	Closure	
4	Waste management			
Objective: To ensure that no waste remains on site after closure.				
4.1	All waste will be removed from site and disposed of at a permitted waste site.	ECO	Closure	
4.2	All waste pits will be suitably covered.	ECO	Closure	
4.3	A site assessment will be carried out after closure to ensure that no waste remains.	ECO	Post-closure	
5	Sewage and waste water management			
Objective: To ensure that no sewage or wastewater contaminants remain after closure.				
5.1	In the case of sewage systems, septic tanks will need to be drained and removed and the area (including the soak away) will need to be filled, preferably with rubble or with fill from an environmentally acceptable source.	Management	Closure	

2.11 Rehabilitation and Closure Objectives



W I L D E R N E S S

The four primary closure objectives are:

1. protect public health and safety, as well as faunal health and safety;
2. alleviate or eliminate environmental damage;
3. return the site to its original condition; and,
4. To the extent achievable, provide for sustainability of social and economic benefits resulting from development and operations.

The defined closure priority is therefore to return the land as closely as possible to the pre-construction condition as possible. All structures will be completely removed to the satisfaction of MEFT.

The site will be suitably re-vegetated or if this is not appropriate then it will be covered with scrub to ensure that soil erosion does not result and to provide protection for reseeded vegetation.

A site assessment will be carried out after closure to ensure that no structures remain and that the site rehabilitation has been fully achieved.

2.12 Guideline tables

Table 6: Disposal of Waste

Items to be considered		Intentions
General	Specific	
Procedures	General	An integrated waste management plan is required. This will cover the storage, handling and transportation of waste.
	Waste minimization and recycling	Opportunities to minimize waste production will be identified and taken where possible. Where possible, waste will be recycled.
Waste disposal facilities	Collection points	A central waste collection point will be established on site. Waste will be separated in order to allow for recycling.
	On site waste disposal facilities	No waste disposal facility will be developed
	Off-site waste disposal facilities	Waste will be disposed of at appropriate permitted waste disposal facilities.
Waste transport	Wilderness Safaris	Waste transport will be carried out according to local authority standards, will undertake the waste transport.



W I L D E R N E S S

Disposal of different types of waste	Hazardous wastes	Hazardous waste will be collected by a contractor with the relevant permits and will be removed to a permitted hazardous waste disposal facility. Hazardous waste may only be stored on site, in a fenced off area with access control, for up to 90 days.
	Non-hazardous waste	Waste will be collected and disposed of at an approved and licensed waste disposal site.
	Any soil polluted by a spill of chemicals	If remediation of the soil in situ is not possible, the soils will be classified as hazardous waste s and will be disposed of at an appropriate permitted waste facility.
	Scrap metal	Care will be taken to ensure that scrap metal does not become polluted or mixed with any other waste. The scrap metal will be collected in a designated area for scrap metal (scrap yard). It will be sold to scrap dealers.
	Oil	Oil will be collected in suitable containers at designated collection points. The collection points will be bunded and underlain by impervious materials to ensure that any spills are contained. Notices will be erected at each waste oil point giving instructions on the procedure for waste oil discharge and collection. An approved subcontractor will remove oil from site.
	Waste separation	Waste will be separated into wood, paper and cardboard, tins and metal, glass, plastic, organic and other. All waste that cannot be recycled or sold will be disposed of at a permitted waste site.
	Bins	Storage in animal-proof containers prior to removal. All waste bins will be covered and secured. If a central waste collection depot is needed, this area should be fenced and secured and it should have a concrete floor to ensure that it can be suitably maintained and no ground seepage will occur.
	Burning	Limited amounts of packaging may be burned in designated pits.
	Organic waste	Organic waste may be buried in suitably designed "animal –proof" deep pits.
	River bed	No waste of any sort is to be buried in riverbeds.

Namib Wilderness Safaris (Pty) Ltd. Reg. No. 87/085

Directors: A Margull, T Knoetze

E: info@wilderness.com.na T: + 264 61 274 500 F: + 264 61 239 455

Cnr Schinz & Merensky Street, Windhoek, Namibia. P.O. Box 6850, Windhoek, Namibia

www.wildernessdestinations.com



W I L D E R N E S S

Table 7: Storage of hazardous chemical substances

Product	Storage
Oils	Mild steel or stainless-steel drums. The containers will be stored in bunded facilities that will have the capacity contain all potential spills. Bunded areas must be capable of containing 110% of the capacity of maximum capacity of the storage containers within the storage areas.
Diesoline	Diesoline will be stored in tanks within bunded areas with smooth, impermeable surfaces. Bunded areas must be capable of containing 110% of the capacity of maximum capacity of the storage containers within the storage areas. Diesoline may be stored in externally clean drums. These drums may only be stored on smooth, impervious surfaces in facilities that will contain spills.
Herbicides & pesticides	These substances will be stored under lock and key and away from food and water sources. Only pyrethroid or similar organic-based pesticides to be used if absolutely essential.
Other: Paint, thinners, varnish, turpentine, detergents etc.	These substances must be stored in clearly marked containers. These containers must be sealable and must not leak. These may only be stored within the workshops and storerooms.

Table 8: Handling of hazardous chemical substances

Product	Handling
Oils	All oils will be handled according to their specific Material Safety Data Sheets.
Diesoline	Diesel will be handled according to its Material Safety Data Sheet. Where possible, diesel transferrals must take place in the designated refuelling areas on smooth, impervious surfaces. Drip trays will be positioned at each machine whilst being refilled. Drip trays will be drained into suitable containers. Smaller plant and tyre wheeled equipment will also re-fuel at the main storage areas.



W I L D E R N E S S

Herbicides & pesticides	Herbicides, pesticides and other potentially poisonous substances will be used according to the manufacturer's specifications. Care will be taken to avoid spills and unnecessary contact with any part of the environment for which they were not intended e.g., soil, water bodies and vegetation or animals. Mixed herbicide/pesticide or other poison shall be kept in clearly marked, closed containers and decanting will occur over a drip tray to prevent spillage, this will not take place within forty meters of any watercourse.
Other: Paint, thinners, varnish, turpentine, detergents etc.	These substances must be used in accordance with their respective MSDS's.

Table 9: Disposal of hazardous chemical substances

Product	Disposal
Hydrocarbons	Old/used hydrocarbons will be stored in drums and weatherproof waste collection containers. Receipts /proof of their final disposal must be received and kept on file.
Other: Paint, thinners, varnish, turpentine, detergents etc.	These substances must be used in accordance with their respective MSDS's.

3. Environmental Monitoring

3.1 Water Monitoring Programme

The aim of the water monitoring programme is to assess the consumption and impact of water use on groundwater quality and availability. Wilderness personnel will be trained to carry out the monitoring programme.

Water monitoring at the lodge and Staff Village is managed by Wilderness as to be based on the following protocol:

- Surface water:
 - Point source discharge must be monitored monthly should there be surface water accumulation. This is unlikely as all sewage water and waste water will collect in dual-chambered septic tanks with herring-bone soak-away systems as well as sub-surface multi-chambered fat traps at guest and staff village kitchens. All point source water discharges will therefore be underground. The depth of the groundwater below the surface limits the possibility of groundwater contamination through percolation.
- Groundwater:



W I L D E R N E S S

- Groundwater usage must be metered and recorded monthly in order to monitor and manage water consumption. The water use must be reported in the monthly Environmental Reports.
 - Groundwater levels at the various boreholes utilised must also be monitored on a monthly basis and recorded in the monthly Environmental Reports.
 - Groundwater quality must be monitored at the boreholes utilised for abstraction as well as any boreholes located within 1km downstream of the camp.
- Parameters:
 - All point source water discharges must comply with the recommended maximum limits for livestock watering in accordance with the South African Guidelines for Livestock Watering. These limits are recognised as a minimum requirement by the Namibian Ministry of Agriculture, Water and Land reform.
 - Groundwater quality must be analysed for and compared to the parameters and limits set in the South African Guidelines for Livestock Watering.

4. Environmental Performance Assessment

The water quality monitoring data must be included in the performance assessment reports.

The programme is to be implemented to assess the level of compliance with environmental legislative requirements and the commitments made in the EMP. Environmental auditing is aimed at ensuring continual improvement in environmental performance.

Table 10: Environmental Performance Assessment Programme for Little Kulala Camp, Staff Village and Airstrip

Frequency of Monitoring	Performance Assessment	Responsibility	Reporting Requirements
CONSTRUCTION			
Monthly	Monthly internal audits of EMP compliance	Environmental Control Officer	Internal report submitted to managers for discussion.
OPERATION			



W I L D E R N E S S

Monthly	Bi-annual internal audits of EMP compliance	Environmental Manager	Internal report submitted to managers for discussion.
---------	---	-----------------------	---

5. Environmental awareness

5.1 Job Specific Environmental Awareness Training

The purpose of the job specific environmental awareness training is to ensure that employees are equipped to implement the actions committed to in the EMP. The staff involved in the operation and maintenance of the Little Kulala Lodge, Staff Village and Airstrip received training regarding the requirements of this EMP.

6. Complaints Register

A complaints register is to be kept at an agreed point. Feedback is to be given to the complainant as to how the complaint is being addressed within 21 days of the complaint being lodged.

7. Environmental Emergency Procedures

7.1 Sewage or Waste Water Spills

Should leaks in the sewerage system or waste water system be detected, then the following actions must be taken:

- The spillage should be contained (bund earth walls) by all means and the source turned off if possible. Depending on the amount of spillage it could be remediated in situ or in the case of large amount of spillage that is contained, could be removed, etc.
- The leakage must be stopped and reason for spill must be rectified.

7.2 Hydrocarbon or Chemical Spills

The objective is to contain and remediate spillages of hydrocarbons (petrol, diesel, oil, lubricants) or chemicals.

The following actions must be taken:

- A spill kit will be placed on site.
- Procedure dealing with various types of spills will be drawn up.
- Contact the management in the event of a spill.



W I L D E R N E S S

- The spillage should be contained (bund earth walls) by all means and the source turned off if possible.
- The management should organise a team to assist with the clean-up.
- Demarcate the spilled area where practicable.
- Move the spill kits to the area.
- Scoop up the spilled substance along with contaminated soil or any absorbent material using the spill kit shovel. Place the scooped up substance into plastic bags.
- The waste bags must be marked as hazardous waste and disposed of as hazardous waste.
- The leakage must be stopped and reason for spill must be rectified.

8. Conclusion

This Environmental Management Plan highlights the management measures that will be implemented in order to mitigate the environmental impacts of the proposed activities.

The EMP is a legal document, which commits the applicant to comply with all management measure, monitoring programmes and other plans as presented herein.

Namib Wilderness Safaris (Pty) Ltd. Reg. No. 87/085

Directors: A Margull, T Knoetze

E: info@wilderness.com.na T: + 264 61 274 500 F: + 264 61 239 455

Cnr Schinz & Merensky Street, Windhoek, Namibia. P.O. Box 6850, Windhoek, Namibia

www.wildernessdestinations.com



W I L D E R N E S S

Namib Wilderness Safaris (Pty) Ltd. Reg. No. 87/085
Directors: A Margull, T Knoetze
E: info@wilderness.com.na T: + 264 61 274 500 F: + 264 61 239 455
Cnr Schinz & Merensky Street, Windhoek, Namibia. P.O. Box 6850, Windhoek, Namibia

www.wildernessdestinations.com



W I L D E R N E S S

Namib Wilderness Safaris (Pty) Ltd. Reg. No. 87/085
Directors: A Margull, T Knoetze
E: info@wilderness.com.na T: + 264 61 274 500 F: + 264 61 239 455
Cnr Schinz & Merensky Street, Windhoek, Namibia. P.O. Box 6850, Windhoek, Namibia

www.wildernessdestinations.com



W I L D E R N E S S

Namib Wilderness Safaris (Pty) Ltd. Reg. No. 87/085
Directors: A Margull, T Knoetze
E: info@wilderness.com.na T: + 264 61 274 500 F: + 264 61 239 455
Cnr Schinz & Merensky Street, Windhoek, Namibia. P.O. Box 6850, Windhoek, Namibia

www.wildernessdestinations.com



W I L D E R N E S S

Namib Wilderness Safaris (Pty) Ltd. Reg. No. 87/085

Directors: A Margull, T Knoetze

E: info@wilderness.com.na T: + 264 61 274 500 F: + 264 61 239 455

Cnr Schinz & Merensky Street, Windhoek, Namibia. P.O. Box 6850, Windhoek, Namibia

www.wildernessdestinations.com